

SABIC® PC Resin PC1003R
Asia Pacific: COMMERCIAL

PC1003R resin is a medium-low flow (MFR = 10 at 300°C/1.2kg), heat and UV stabilized, polycarbonate product with mold release designed for use in the general purpose molding market. It is available exclusively at www.sabicpc.com

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Tensile Stress, yld, Type I, 50 mm/min	63	MPa	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	6	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	>70	%	ASTM D 638
Tensile Modulus, 50 mm/min	2350	MPa	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	90	MPa	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	2300	MPa	ASTM D 790
Hardness, Rockwell R	120	-	ASTM D 785
Tensile Stress, yield, 50 mm/min	63	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	6	%	ISO 527
Tensile Strain, break, 50 mm/min	>70	%	ISO 527
Tensile Modulus, 1 mm/min	2350	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	90	MPa	ISO 178
Flexural Modulus, 2 mm/min	2300	MPa	ISO 178
Hardness, Rockwell R	120	-	ISO 2039-2
IMPACT			
Izod Impact, unnotched, 23°C	NB	J/m	ASTM D 4812
Izod Impact, notched, 23°C	800	J/m	ASTM D 256
Instrumented Impact Energy @ peak, 23°C	65	J	ASTM D 3763
Izod Impact, unnotched 80*10*3 +23°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, unnotched 80*10*3 -30°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, notched 80*10*3 +23°C	70	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	12	kJ/m ²	ISO 180/1A

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176.C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
 (3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
 (4) Internal measurements according to UL standards.
 (5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

Visit www.sabicpc.com for additional information about SABIC® PC resins.

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabicpc.com> AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right. SABIC Innovative Plastics is a trademark of SABIC Holding Europe B.V.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved

SABIC® PC Resin PC1003R
Asia Pacific: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
Vicat Softening Temp, Rate B/50	143	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm	138	°C	ASTM D 648
HDT, 1.82 MPa, 3.2 mm	127	°C	ASTM D 648
CTE, -40°C to 95°C, flow	7.E-05	1/°C	ASTM E 831
Thermal Conductivity	0.2	W/m-°C	ASTM C 177
Thermal Conductivity	0.2	W/m-°C	ISO 8302
CTE, 23°C to 80°C, flow	7.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	Passes	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	143	°C	ISO 306
HDT/Bf, 0.45 MPa Flatw 80*10*4 sp=64mm	138	°C	ISO 75/Bf
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	127	°C	ISO 75/Af
PHYSICAL			
Specific Gravity	1.2	-	ASTM D 792
Water Absorption, equilibrium, 23C	0.35	%	ASTM D 570
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.5 - 0.7	%	SABIC Method
Mold Shrinkage, flow, 3.2 mm (5)	0.5 - 0.7	%	SABIC Method
Melt Flow Rate, 300°C/1.2 kgf	10	g/10 min	ASTM D 1238
Density	1.2	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.35	%	ISO 62
Melt Volume Rate, MVR at 300°C/1.2 kg	9	cm ³ /10 min	ISO 1133
OPTICAL			
Light Transmission, 2.54 mm	88 - 90	%	ASTM D 1003
Haze, 2.54 mm	<0.8	%	ASTM D 1003
Refractive Index	1.586	-	ASTM D 542
Refractive Index	1.586	-	ISO 489

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176.C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>. AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed Seller. No statement Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right. SABIC Innovative Plastics is a trademark of SABIC Holding Europe B.V.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved

SABIC® PC Resin PC1003R
Asia Pacific: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	ASTM D 257
Dielectric Strength, 1.6 mm	27	kV/mm	ASTM D 149
Relative Permittivity, 60 Hz	3	-	ASTM D 150
Relative Permittivity, 1 MHz	3	-	ASTM D 150
Dissipation Factor, 60 Hz	0.001	-	ASTM D 150
Dissipation Factor, 1 MHz	0.01	-	ASTM D 150
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Dielectric Strength, 1.6 mm	27	kV/mm	IEC 60243-1
Relative Permittivity, 60 Hz	3	-	IEC 60250
Relative Permittivity, 1 MHz	3	-	IEC 60250
Dissipation Factor, 60 Hz	0.001	-	IEC 60250
Dissipation Factor, 1 MHz	0.01	-	IEC 60250

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>. AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED. (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed Seller. No statement Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right. SABIC Innovative Plastics is a trademark of SABIC Holding Europe B.V.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved

SABIC® PC Resin PC1003R
Asia Pacific: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	120	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	280 - 310	°C
Nozzle Temperature	270 - 290	°C
Front - Zone 3 Temperature	280 - 310	°C
Middle - Zone 2 Temperature	270 - 290	°C
Rear - Zone 1 Temperature	260 - 280	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	80 - 110	°C

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±1/76°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>. AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED. (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed Seller. No statement Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right. SABIC Innovative Plastics is a trademark of SABIC Holding Europe B.V.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved

SABIC® PC Resin PC1003R
Asia Pacific: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

SABIC PC PC1003R

Melt Temperature : 295°C

Mold Temperature : 95°C

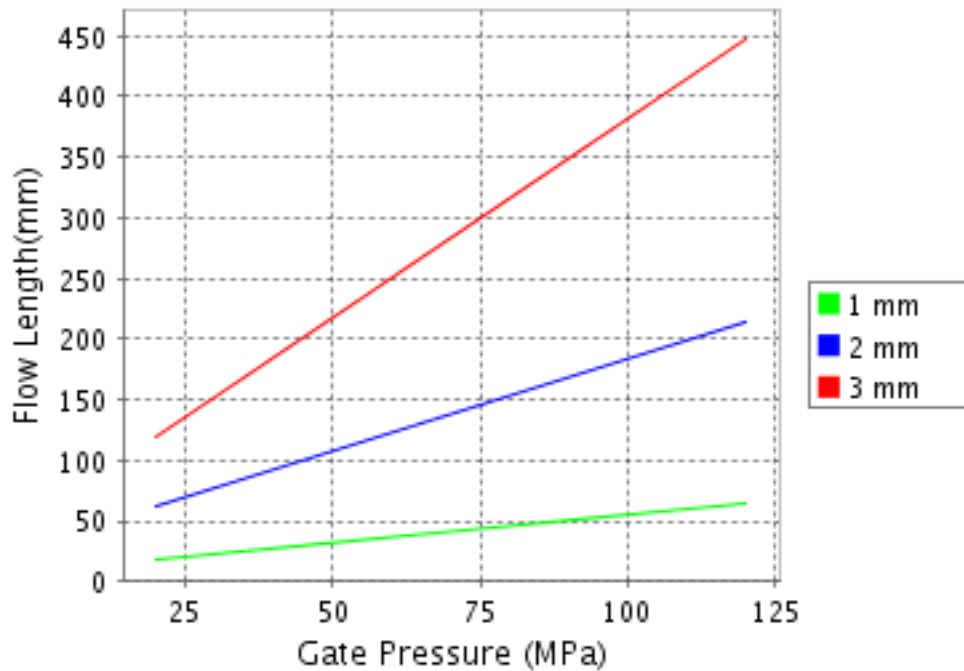

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

® Moldflow is a registered trademark of the Moldflow Corporation.

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>. AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED. (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed Seller. No statement Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right. SABIC Innovative Plastics is a trademark of SABIC Holding Europe B.V.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved